


Rear roller with hydraulic adjustment:

- Ø 580 mm cage roller
- Ø 580 mm angled roller

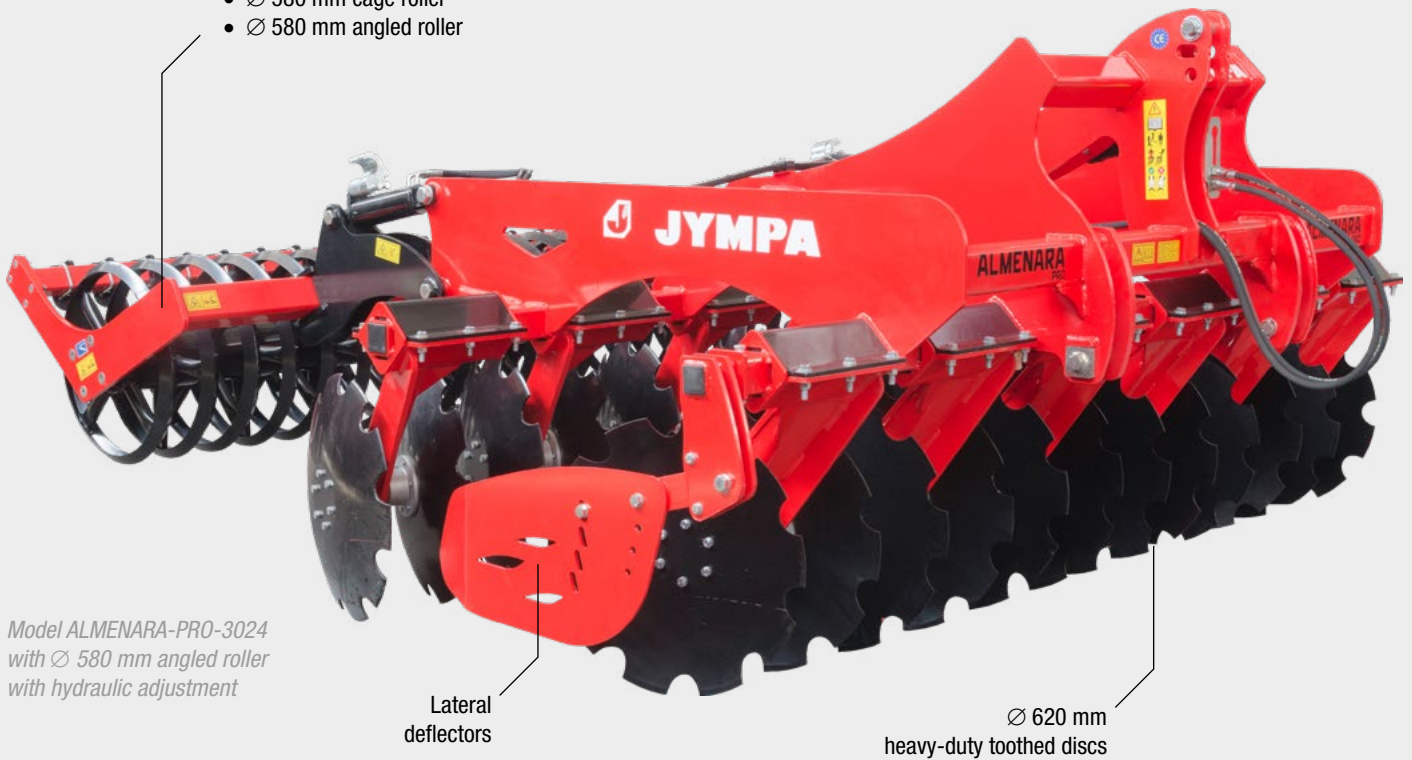

Model ALMENARA-PRO-3024
with Ø 580 mm angled roller
with hydraulic adjustment

Lateral
deflectors

Ø 620 mm
heavy-duty toothed discs

Agriculture


ALMENARA PRO

Fast disc harrow

ALMENARA PRO is the top of the range of JYMPA fast disc harrows, with models of up to seven metres working width, and designed to meet the needs of the most demanding farmers.

In addition to all the features of the ALMENARA harrows, there are the Ø 620 mm discs that achieve a working depth of more than 15 cm and a rear cage or angled roller, always with hydraulic adjustment to set the working depth more quickly and accurately.

“For the most demanding”

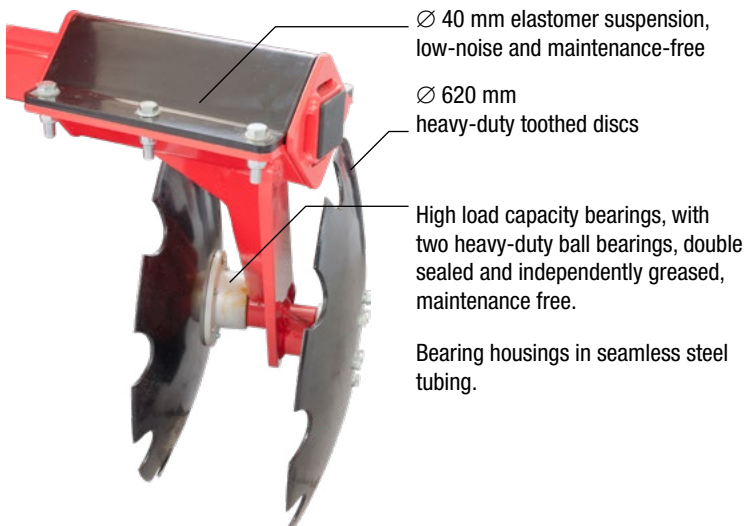

Ø 40 mm elastomer suspension,
low-noise and maintenance-free

Ø 620 mm
heavy-duty toothed discs

High load capacity bearings, with
two heavy-duty ball bearings, double
sealed and independently greased,
maintenance free.

Bearing housings in seamless steel
tubing.



Accessories



Model ALMENARA-PRO-3024
with \varnothing 580 mm angled roller
with hydraulic adjustment



Cage roller
 \varnothing 580 mm



Angled roller
 \varnothing 580 mm



Model ALMENARA-PRO-3024
with \varnothing 580 mm angled roller
with hydraulic adjustment

Optional elements:

- Hydraulic folding with 4 cylinders
(models ALMENARA-PRO-6048-P, ALMENARA-PRO-7056-P)
- Lights kit
- V20 reflecting plates

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening security system**.

Model	Required power HP	Folding	Working width m	Transport width m	No. discs	\varnothing discs mm	Hitch category	Aprox weight. (WITHOUT roller) kg	Weight \varnothing 580 mm cage roller kg	Weight \varnothing 580 mm angled roller kg
ALMENARA-PRO-3024	120-140	Fixed	3,00	3,00	24	620	II	1.415	310	395
ALMENARA-PRO-3528	140-160	Fixed	3,50	3,50 \blacklozenge	28	620	II	1.650	360	480
ALMENARA-PRO-4032	160-180	Fixed	4,00	4,00 \blacklozenge	32	620	II	1.820	410	505
ALMENARA-PRO-4032-PC	140-180	Folded	4,00	2,40	32	620	II	2.440	410	505
ALMENARA-PRO-5040-PC	180-200	Folded	5,00	2,40	40	620	II	2.760	520	740
ALMENARA-PRO-6048-PC	200-260	Folded	6,00	2,40	48	620	II	3.080	620	790
ALMENARA-PRO-7056-PC	260-320	Folded	7,00	2,40	56	620	II	3.400	720	960

— Models with hydraulic folding. When folded, their total width is less than or equal to 3,05 m.

\blacklozenge Models with total width > 3,05 m (please refer to the current traffic regulations in force in your country).