


Model *ESPIGOL-16*
with hydraulic
variable opening

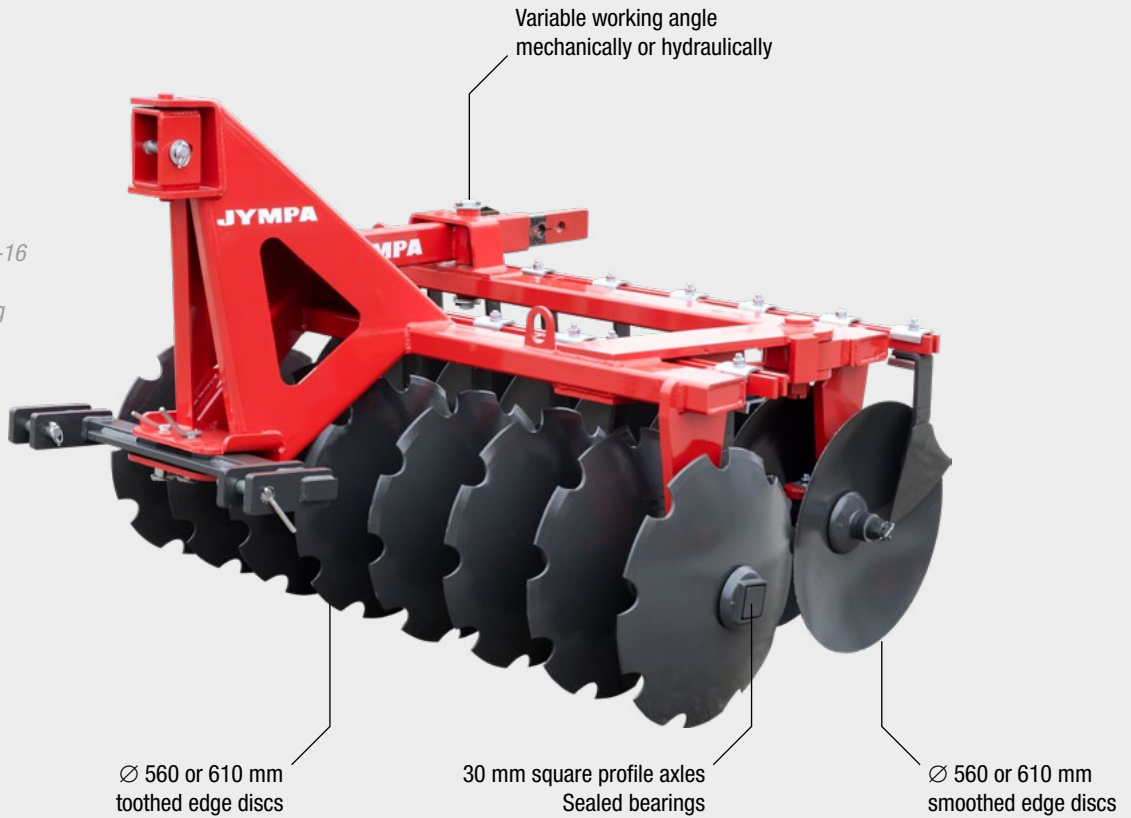

Ø 560 or 610 mm
toothed edge discs

30 mm square profile axles
Sealed bearings

Ø 560 or 610 mm
smoothed edge discs

Agriculture

ESPIGOL

Suspended disc harrow

The small dimensions of the **ESPIGOL** disc harrows are ideal for farmers with small fields or tractors with limited power.

Robustly built and easy to maintain, the working angle of the rear discs can be adjusted mechanically or hydraulically, allowing them to be perfectly adapted to the specific needs of each farmer.

**“For small tractors
or small fields”**



Model *ESPIGOL-16*
with manual variable opening



Model ESPIGOL-22 with hydraulicly variable working angle

Optional elements:

- Lights kit
- V20 reflecting plates

Model	Required power HP	Machine width m	Working width m	Working depth cm	Clearance cm	No. discs	Ø discs mm	Hitch category	Approximate weight kg
ESPIGOL-14	45-55	1,70	1,60	10 - 15	65	14	560 - 610	II	550
ESPIGOL-16	55-60	1,95	1,85	10 - 15	65	16	560 - 610	II	620
ESPIGOL-18	60-65	2,17	2,07	10 - 15	65	18	560 - 610	II	710
ESPIGOL-20	65-75	2,43	2,33	10 - 15	65	20	560 - 610	II	815
ESPIGOL-22	75-80	2,60	2,50	10 - 15	65	22	560 - 610	II	895