



Agriculture


TANDEM

Subsoiler with V-shaped chassis + fast harrow

TANDEM is the combination of a traditional subsoiler with a fast harrow and roller, making it a versatile, modular, easily adaptable and easy-to-maintain machine, very suitable for cereal crops.

Its modular design allows the deep tillage of the subsoiler and the shallow tillage of the fast harrow to be carried out separately, or they can be quickly coupled and perform the same work together, leaving the soil ready for sowing, saving time and fuel.

“Compact and modular design”

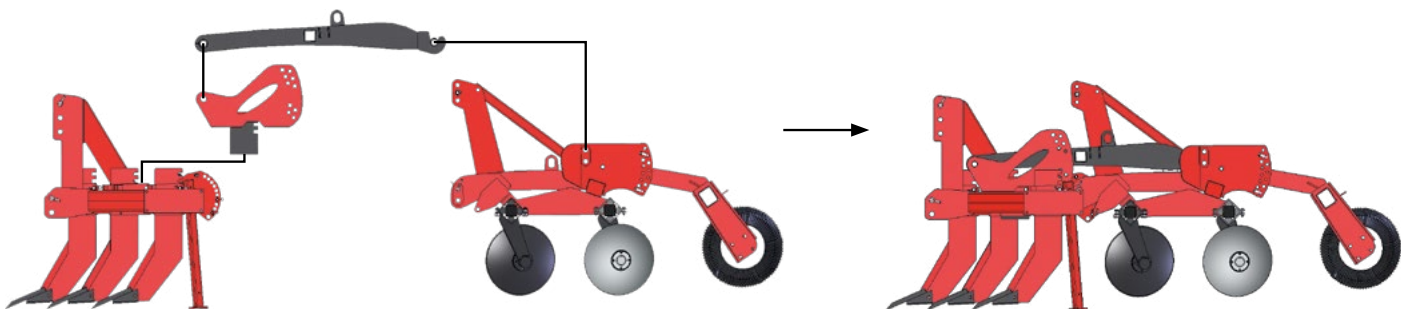


Subsoiler + Roller

- Breaks the hard layer of the soil.
- Adjustable tines working depth.
- Easy hitch.
- Working depth: 60-70 cm.

Fast harrow + Roller

- Soil preparation.
- Crushing crop and harvest residues.
- Working depth: 3-12 cm.
- Working speed 3-15 km/h.

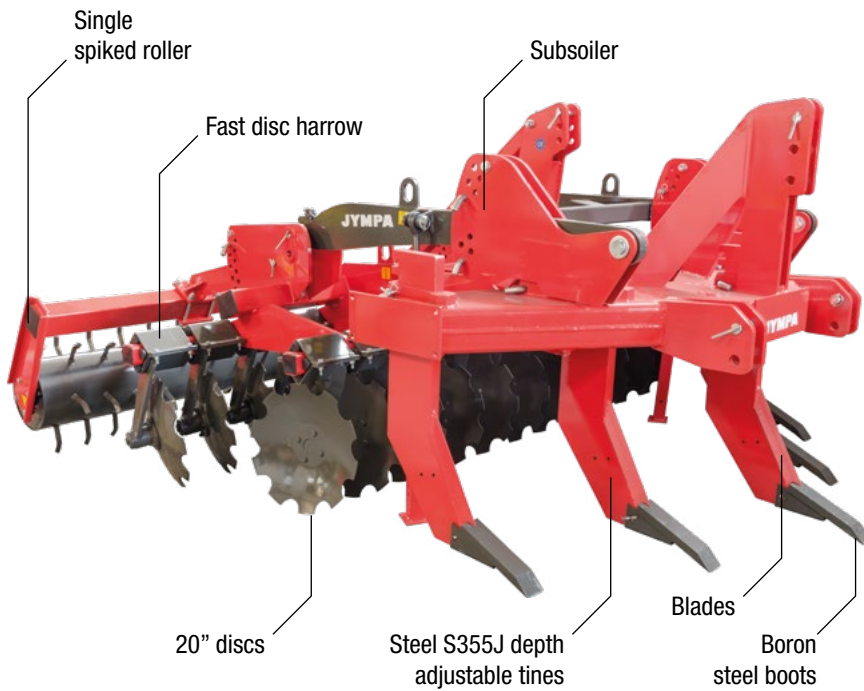

Model TANDEM-3000



**Technological
innovation award**



Optional elements:

- Levelling wheels
- Lightning kit
- V20 reflective plates



Model TANDEM-3000 with metal levelling wheels (optional)



The automatic coupling allows quick and easy attachment and detachment.

Model	Required power HP	Subsoiler model	Machine width m	Working width m	Working depth cm	Clearance cm	No. tines	Tines section mm	No. discs	Ø discs inches	Hitch category	Approximate weight kg
TANDEM-2600	120-150	ANTARES-5	2.57	2.48	25 - 55	72	5	30 x 180	18	20"	2	1,800
TANDEM-3000	150-180	ANTARES-5-R	3.05	2.92	25 - 55	79	5	40 x 200	22	20"	3	2,470
TANDEM-3700	180-220	ANTARES-7	3.72 ♦	3.60	25 - 55	79	7	40 x 200	28	20"	3	2,850

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country)