



Agriculture

NEPER

Vibro-cultivator

Ideal machine to perfectly crumble the surface layer of the soil and perform the last work before sowing.

Its strong and flexible reinforced tines are very resistant and durable, with good vibration absorption.

The cage roller is highly recommended for determining the working depth and crumbling soil clods. The harrow facilitates the surface finish by creating a lodging for the seeds.


“To prepare the seedbed”



Model NEPER-9-2F with $\varnothing$ 410 mm single cage roller



8 - 20 cm
working depth

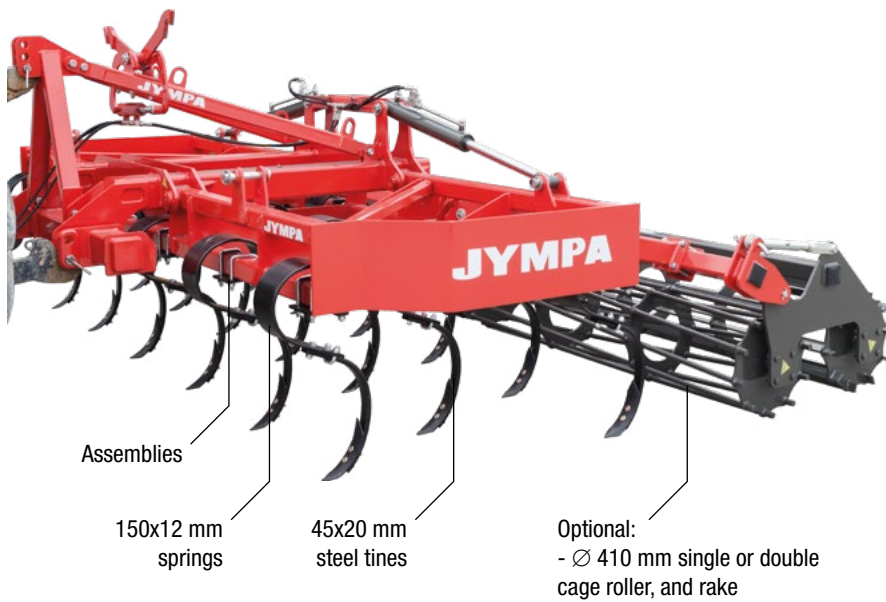

Model NEPER-18-3F-PC with Ø 410 mm double cage roller

Roller options




Single cage roller




Rake

2 ROWS OF TINES

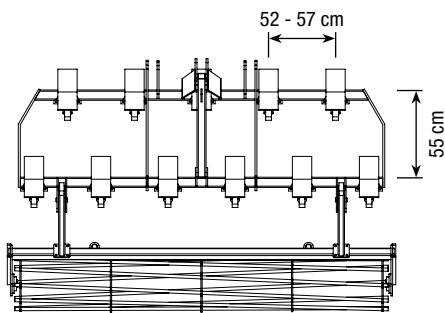

3 ROWS OF TINES

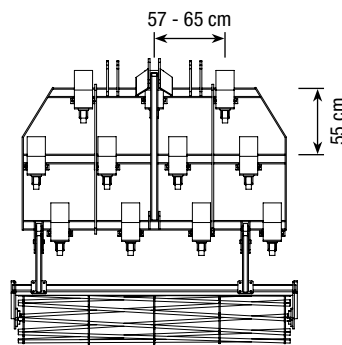

Optional elements:

- Straight or swallow-shaped points
- Steel or tungsten straight points
- Levelling wheels
- Lightning kit
- V20 reflective plates

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Model	Required power HP	Folding	Distribution folded frame	Machine width m	Working depth cm	Clearance cm	N° rows	N° tines	Rows spacing cm	Tines spacing cm	Hitch category	Approximate weight kg
2 ROWS OF TINES												
NEPER-9-2F	50-60	Fixed	-	2.75	8 - 20	65	2	9	55	57	2	435
NEPER-11-2F	60-70	Fixed	-	3.05	8 - 20	65	2	11	55	52	2	550
3 ROWS OF TINES												
NEPER-11-3F	50-70	Fixed	-	2.25	8 - 20	65	3	11	55	59	2	655
NEPER-13-3F	70-90	Fixed	-	2.75	8 - 20	65	3	13	55	57	2	735
NEPER-15-3F	90-110	Fixed	-	3.05	8 - 20	65	3	15	55	60	2	850
NEPER-18-3F-PC	140-180	Central hydr.	9+9	4.20	8 - 20	65	3	18	55	65	3	1,950
NEPER-22-3F-PC	180-200	Central hydr.	11+11	5.20	8 - 20	65	3	22	55	65	3	2,400
NEPER-26-3F-PC	200-250	Central hydr.	13+13	6.00	8 - 20	65	3	26	55	65	3	2,800
NEPER-28-3F-PC	250-280	Central hydr.	14+14	6.50	8 - 20	65	3	28	55	65	3 - 4	3,000
NEPER-30-3F-PC	280-320	Central hydr.	15+15	7.00	8 - 20	65	3	30	55	65	3 - 4	3,200

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country).