



Agriculture

OSIRIS

Semi-chisel

The **OSIRIS** semi-chisel allows secondary soil work up to 30 cm depth to be carried out quickly and efficiently.

The reinforced tines of 30x30 or 35x35 mm profile have a proven durability and are prepared to reliably perform the toughest tasks. They are attached to the chassis and adapt to the ground by means of springs or elastomers.

“The most versatile”




Spring or elastomer damped tines



Model OSIRIS-EL-19-2F-PL with swallow-shaped points, elastomer damped tines, Ø 410 mm single cage roller and rake.



15 - 30 cm
working depth

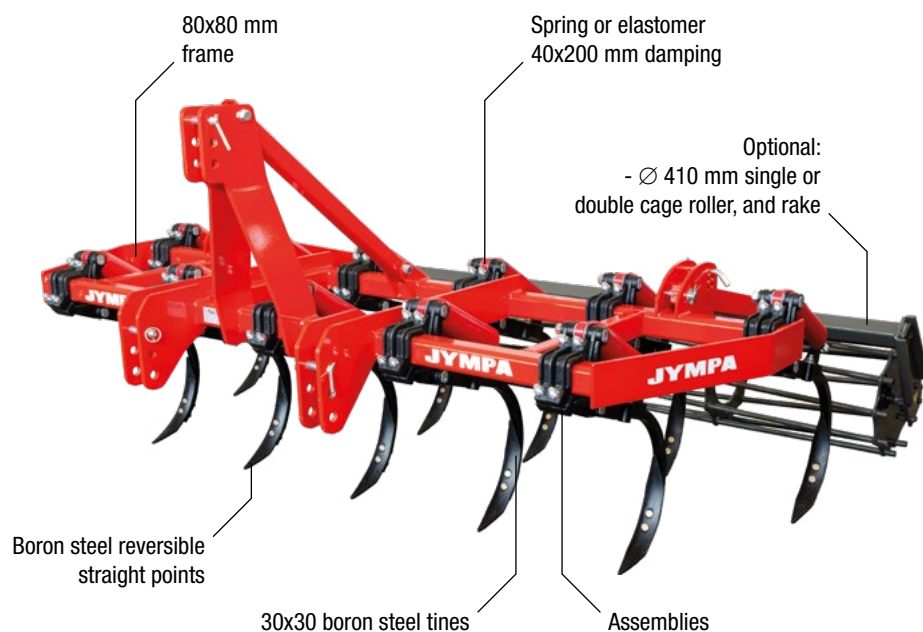

Model OSIRIS-11-2F with Ø 410 mm single cage roller



Roller options



Single cage roller



Rake

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Optional elements:

- Straight or swallow-shaped points
- Steel or tungsten straight points
- 35x35 mm tines
- Levelling wheels
- Lightning kit
- V20 reflective plates

Model	Required power HP	Folding	Distribution folded frame	Machine width m	Working depth cm	Clearance cm	N° rows	N° tines	Rows spacing cm	Tines spacing cm	Hitch category	Approximate weight kg
-------	----------------------	---------	------------------------------	--------------------	---------------------	-----------------	---------	----------	--------------------	---------------------	----------------	--------------------------

2 ROWS OF TINES

OSIRIS-7-2F / * EL-7-2F	70-90	Fixed	-	2.00	15 - 30	65	2	7	80	54	2 N	480
OSIRIS-9-2F / * EL-9-2F	90-110	Fixed	-	2.50	15 - 30	65	2	9	80	54	2	595
OSIRIS-11-2F / * EL-11-2F	110-130	Fixed	-	3.05	15 - 30	65	2	11	80	54	2	690
OSIRIS-13-2F-PC / * EL-13-2F-PC	130-140	Central hydr.	7+6	3.50	15 - 30	65	2	13	80	53	2 - 3	1,115
OSIRIS-15-2F-PC / * EL-15-2F-PC	140-170	Central hydr.	8+7	4.20	15 - 30	65	2	15	80	54	3	1,255
OSIRIS-17-2F-PC / * EL-17-2F-PC	170-200	Central hydr.	9+8	4.70	15 - 30	65	2	17	80	54	3	1,395
OSIRIS-19-2F-PC / * EL-19-2F-PC	200-220	Central hydr.	10+9	5.20	15 - 30	65	2	19	80	53	3	1,505
OSIRIS-21-2F-PC / * EL-21-2F-PC	220-250	Central hydr.	11+10	5.70	15 - 30	65	2	21	80	54	3	1,810
OSIRIS-23-2F-PC / * EL-23-2F-PC	250-280	Central hydr.	12+11	6.20	15 - 30	65	2	23	80	54	3	1,980

3 ROWS OF TINES

OSIRIS-11-3F / * EL-11-3F	110-130	Fixed	-	2.50	15 - 30	65	3	11	70	70	2	645
OSIRIS-13-3F / * EL-13-3F	130-140	Fixed	-	3.05	15 - 30	65	3	13	70	70	2	750
OSIRIS-15-3F-PC / * EL-15-3F-PC	140-170	Central hydr.	8+7	3.80	15 - 30	65	3	15	70	75	3	1,480
OSIRIS-17-3F-PC / * EL-17-3F-PC	170-200	Central hydr.	9+8	4.20	15 - 30	65	3	17	70	75	3	1,575
OSIRIS-19-3F-PC / * EL-19-3F-PC	190-220	Central hydr.	10+9	4.70	15 - 30	65	3	19	70	75	3	1,670
OSIRIS-21-3F-PC / * EL-21-3F-PC	220-250	Central hydr.	11+10	5.20	15 - 30	65	3	21	70	75	3	1,880
OSIRIS-23-3F-PC / * EL-23-3F-PC	250-280	Central hydr.	12+11	5.70	15 - 30	65	3	23	70	75	3	1,970

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.

* Reference for OSIRIS with elastomers.