



Agriculture

ALASIA


Eco soil loosener

To loosen the soil in fields managed under direct drilling, grassland, arable farming, minimum tillage or Keyline farming systems, with the aim of making the most efficient use of water resources while minimizing erosion and preserving the environment.


The front discs cut through crop residues, allowing the tines to work without obstruction. The tines create drainage channels that promote rainwater infiltration and help build up moisture reserves, without disturbing the soil surface or breaking the natural channels formed by plant roots.

Mechanical shear bolts protect both the machine and the tractor in the event of the tines striking or becoming caught on an obstacle.


**“Maximum respect
for the environment”**

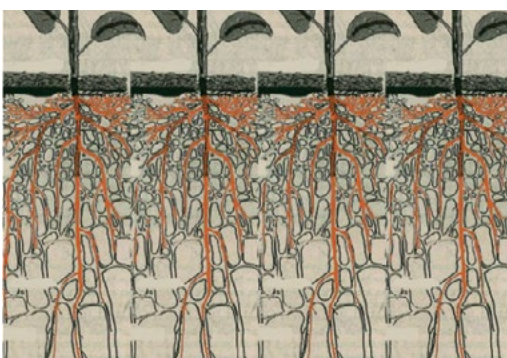

After harvesting the roots leave behind natural mini-ducts

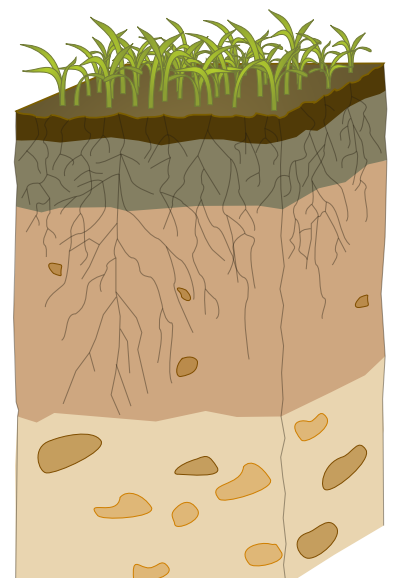

No mixing of soil layers

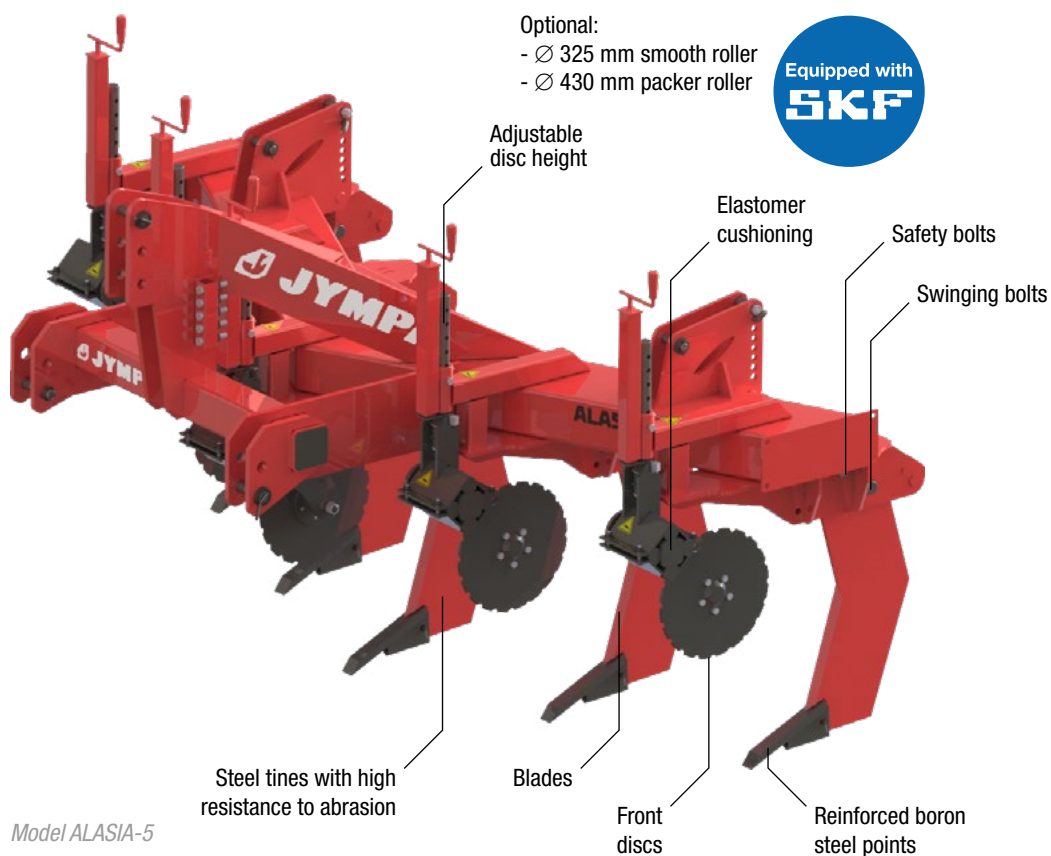

Model ALASIA-5

Roller options



Ø 325 mm smooth roller



Ø 430 mm packer roller

DYNAMIC SCAN by JYMPA

It measures the degree of compaction of the soil and generates hardness maps in real time.



Optional elements:

- Kit Dynamic Scan
- Tungsten points
- Points with wings
- Roller hydraulically adjustable
- Lightning kit
- V20 reflective plates

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Model	Required power HP	Folding	Security system	Width without roller m	Width with roller m	Working depth cm	Clearance cm	No. tines	Tines section mm	Tines spacing cm	Hitch category	Approximate weight kg
ALASIA-3	90-120	Fixed	Mechanical	1.66	1.98	55	90	3	15 x 240	70	2	600
ALASIA-3-OL	90-120	Fixed	Hydraulic	1.66	1.83	55	90	3	15 x 240	64	2 N	850
ALASIA-4	120-180	Fixed	Mechanical	2.24	2.40	55	90	4	15 x 240	65	3	970
ALASIA-4-OL	120-180	Fixed	Hydraulic	2.24	2.40	55	90	4	15 x 240	65	3	1,020
ALASIA-5	170-220	Fixed	Mechanical	2.89	3.05	55	90	5	15 x 240	65	3	1,080
ALASIA-5-OL	170-240	Fixed	Hydraulic	2.89	3.05	55	90	5	15 x 240	65	3	1,150
ALASIA-5-R	170-220	Fixed	Mechanical	3.05	3.25 ♦	55	90	5	15 x 240	70	3	1,100
ALASIA-5-R-OL	170-240	Fixed	Hydraulic	3.05	3.25 ♦	55	90	5	15 x 240	70	3	1,250

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country).