



Agriculture

RIGEL

Fixed subsoiler with 2V-shaped chassis


The **RIGEL** subsoiler is the natural evolution of the original ANTARES model, for working on land with stubble or a lot of plant debris on the ground surface.


Its tines are distributed in two V-shaped chassis, so that there is a greater distance between the tines and a subsoiler with 3, 4, 5 or 6 rows of tines is obtained, with less resistance to the advance, reducing fuel consumption and reducing clogging.

“Lower fuel consumption and reduced clogging”



Model RIGEL-7-2V-440 with cast steel boots and $\varnothing$ 580 mm single roller

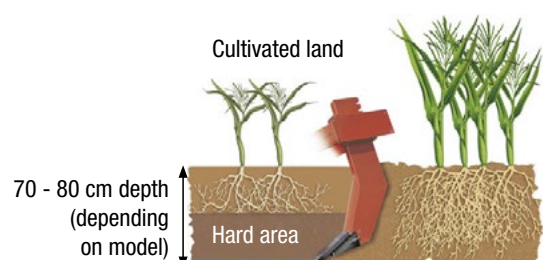

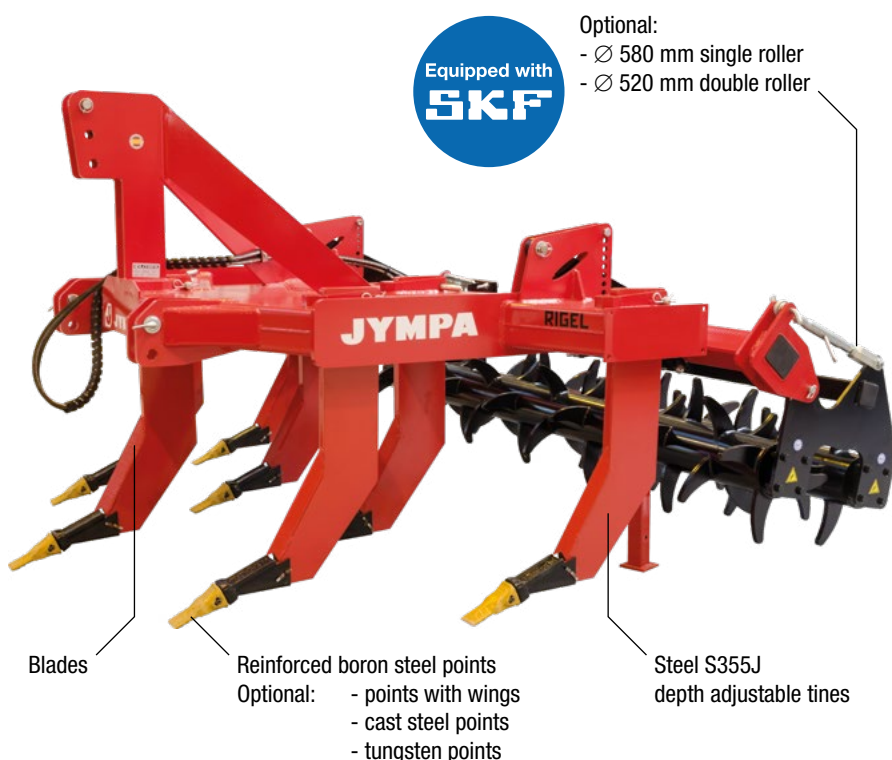

Model RIGEL-7-2V-440 with Ø 520 mm double roller and cast steel points

Roller options



Ø 580 mm single roller



Ø 520 mm double roller



Model RIGEL-9-2V-PC with Ø 580 mm single roller

Optional elements:

- Cast steel points
- Tungsten points
- Points with wings
- Tines with wings
- Multi-position tines
- Roller hydraulically adjustable
- Levelling wheels
- Lightning kit
- V20 reflective plates

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Model	Required power HP	Folding	Distribution folded frame	Width without roller m	Width with single roller m	Width with double roller m	Working depth cm	Clearance cm	No. tines	Tines section mm	Tines spacing cm	Hitch category	Approximate weight kg
RIGEL-5E-2V	100-130	Fixed	-	2.05	2.44	2.55	60	69	5	40 x 180	47 / 94	2	710
RIGEL-5R-2V	130-160	Fixed	-	2.38	2.81	2.90	70	79	5	40 x 200	55 / 110	3 N	925
RIGEL-5-SR50-2V	140-180	Fixed	-	2.41	2.81	2.90	80	87	5	50 x 220	55 / 110	3 N	1,080
RIGEL-7-2V-440	150-200	Fixed	-	2.80	3.05	3.05	70	79	7	40 x 200	44 / 88	3	1,270
RIGEL-7-2V	150-200	Fixed	-	2.98	3.48 ♦	3.47 ♦	70	79	7	40 x 200	47 / 94	3	1,320
RIGEL-7-SR50-2V-440	180-250	Fixed	-	2.80	3.05	3.05	80	87	7	50 x 220	44 / 88	3	1,630
RIGEL-9-2V	225-300	Fixed	-	4.38 ♦	4.83 ♦	4.92 ♦	75	86	9	40 x 245	52 / 104	3	1,950
RIGEL-9-2V-PC	225-300	Central hydr.	4+1+4	4.40	4.62	4.74	75	86	9	40 x 245	50 / 100	3 - 4	2,700
RIGEL-9-SR50-2V-PC	300-400	Central hydr.	4+1+4	4.40	4.62	4.74	80	87	9	50 x 220	50 / 100	3 - 4	3,100

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country).