



Vineyards and orchards

OSIRIS-V

Semi-chisel

The **OSIRIS-V** semi-chisel cultivator is a versatile and functional tool, adapted to the dimensions of vineyards and orchards. Its 30 x 30 mm reinforced tines with springs or elastomers cushioning, break up and oxygenate the topsoil, carrying out secondary work up to 30 cm deep.

It also allows multiple optional elements to adapt to all the user's needs: turret with hydraulic vertical lift, hydraulically extendable chassis, in-row weeders, hydraulic power unit, etc.


“The most versatile one”



15 - 30 cm
working depth



*Model OSIRIS-V9
with hydraulically extendable frame
and turret with hydraulic vertical lift*

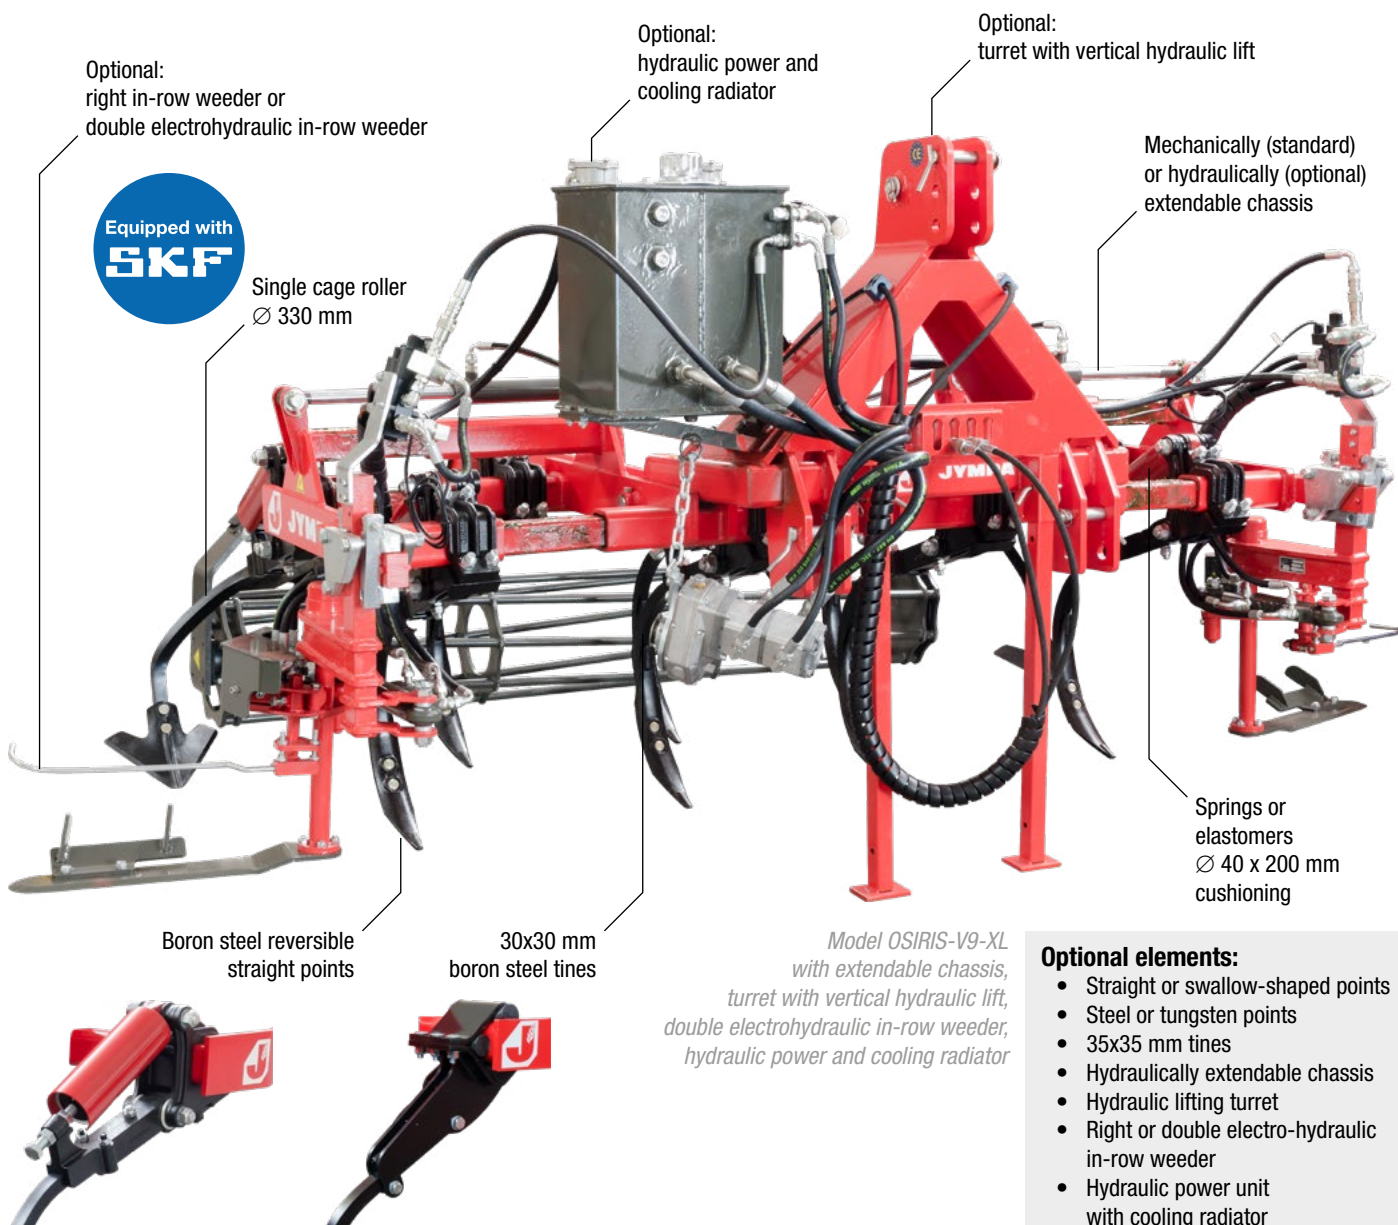

*Model OSIRIS-V9-XL
with extendable chassis,
turret with vertical hydraulic lift,
double electrohydraulic in-row weeder,
hydraulic power and cooling radiator*

Optional elements:

- Straight or swallow-shaped points
- Steel or tungsten points
- 35x35 mm tines
- Hydraulically extendable chassis
- Hydraulic lifting turret
- Right or double electro-hydraulic in-row weeder
- Hydraulic power unit with cooling radiator
- Lightning kit
- V20 reflective plates

Tines with spring or elastomer cushioning

30x30 mm tines with springs

Model	Required power HP	Machine width m	Working depth cm	Clearance cm	No. rows	No. tines	Rows spacing cm	Tines spacing cm	Hitch category	Approximate weight kg
OSIRIS-V7	50-75	1.30-1.70	15 - 30	65	2	7	58	55	2 N	615
OSIRIS-V9	65-95	1.60-2.00	15 - 30	65	2	9	58	55	2 N	750
OSIRIS-V9-XL	65-95	2.00-2.50	15 - 30	65	2	9	58	55	2 N	790
OSIRIS-V11	90-120	2.40-2.90	15 - 30	65	2	11	58	55	2 N	890

30x30 mm tines with Ø 40 mm elastomers

OSIRIS-EL-V7	50-75	1.30-1.70	15 - 30	65	2	7	58	55	2 N	615
OSIRIS-EL-V9	65-95	1.60-2.00	15 - 30	65	2	9	58	55	2 N	750
OSIRIS-EL-V9-XL	65-95	2.00-2.50	15 - 30	65	2	9	58	55	2 N	790
OSIRIS-EL-V11	90-120	2.40-2.90	15 - 30	65	2	11	58	55	2 N	890