



Agriculture

ANTARES

Fixed subsoiler with V-shaped chassis


The **ANTARES** subsoiler has a very robust construction, to perform a deep tillage and decompact the soil efficiently and reliably.

It is the original model with V-shaped chassis developed by JYMPA over 50 years ago, pioneer in incorporating the height adjustment of the tines, improved and optimized to better penetrate the ground with minimal draft resistance. The wide range of models and optional equipment covers all the needs.


“Great robustness and resistance”



45 - 80 cm depth
(depending on model)

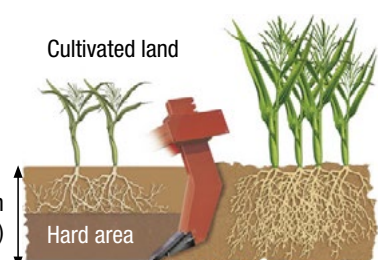

Model ANTARES-9-SR50-PC with cast steel boots and $\varnothing$ 520 mm double roller

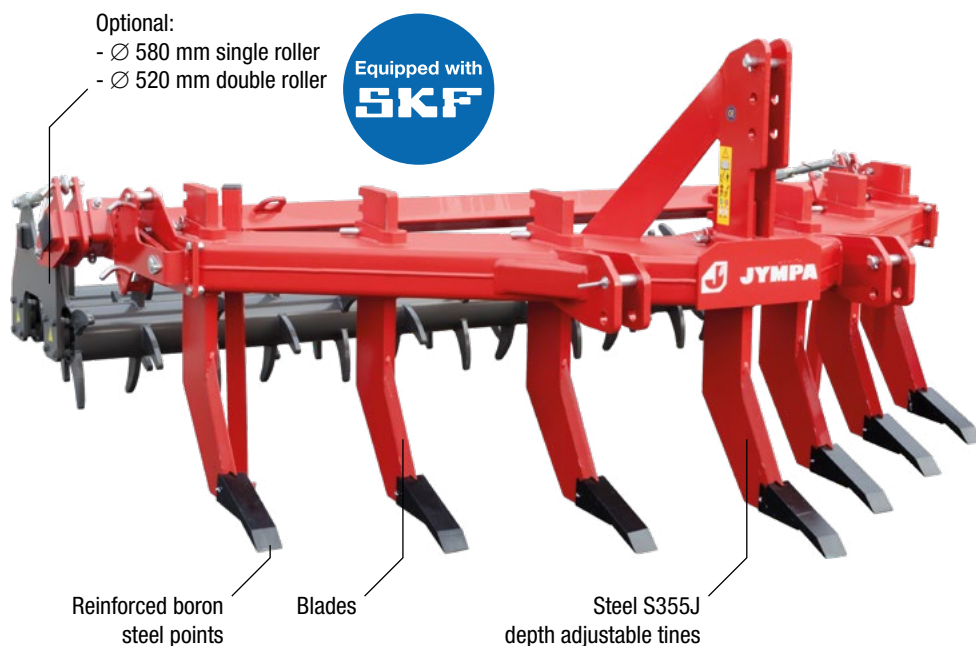

Model ANTARES-7 with Ø 520 mm double roller

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Roller options



Ø 580 mm single roller



Ø 520 mm double roller

Optional elements:

- Cast steel points
- Tungsten points
- Points with wings
- Tines with wings
- Multi-position tines
- Roller hydraulically adjustable
- Levelling wheels
- Lightning kit
- V20 reflective plates

Model	Required power HP	Folding	Distribution folded frame	Width without roller m	Width with single roller m	Width with double roller m	Working depth cm	Clearance cm	No. tines	Tines section mm	Tines spacing cm	Hitch category	Approximate weight kg
ANTARES-1-R	45-70	Fixed	-	0.74	-	-	60	72	1	40 x 180	-	2 N	210
ANTARES-3-M	30-45	Fixed	-	1.22	-	-	45	60	3	25 x 130	55	2 N	200
ANTARES-3	55-65	Fixed	-	1.40	1.58	1.85	60	72	3	30 x 180	63	2 N	315
ANTARES-3-R4	55-80	Fixed	-	1.40	1.58	1.85	60	72	3	40 x 180	63	2 N	360
ANTARES-3-7	55-65	Fixed	-	1.65	1.85	2.10	60	72	3	30 x 180	75	2 N	375
ANTARES-3-7-R4	55-75	Fixed	-	1.65	1.85	2.10	60	72	3	40 x 180	75	2	420
ANTARES-5	65-80	Fixed	-	1.83	2.20	2.33	60	72	5	30 x 180	42	2	450
ANTARES-5-E	80-130	Fixed	-	2.05	2.44	2.55	60	72	5	40 x 180	47	2	575
ANTARES-5-R	130-160	Fixed	-	2.35	2.81	2.90	70	79	5	40 x 200	55	3 N	730
ANTARES-5-SR50	150-180	Fixed	-	2.35	2.81	2.90	80	87	5	50 x 220	55	3 N	1,160
ANTARES-7-440	160-200	Fixed	-	2.80	3.05	3.05	70	79	7	40 x 200	44	3	1,050
ANTARES-7	160-200	Fixed	-	2.98	3.48♦	3.47♦	70	79	7	40 x 200	47	3	1,100
ANTARES-7-SR50	170-250	Fixed	-	3.30♦	3.76♦	3.87♦	80	87	7	50 x 220	52	3	1,570
ANTARES-9	250-350	Fixed	-	4.45♦	4.83♦	4.92♦	75	86	9	40 x 245	52	3	1,850
ANTARES-9-SR-PC	250-350	Central hydr.	4+1+4	4.54	4.83	4.92	75	86	9	40 x 245	52	3 - 4	2,050
ANTARES-9-SR50-PC	300-400	Central hydr.	4+1+4	4.54	4.83	4.92	80	87	9	50 x 220	52	3 - 4	2,270
ANTARES-11-SR-PC	400-500	Central hydr.	5+1+5	5.40	5.85	5.92	75	86	11	40 x 245	52	3 - 4	2,900

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country).