


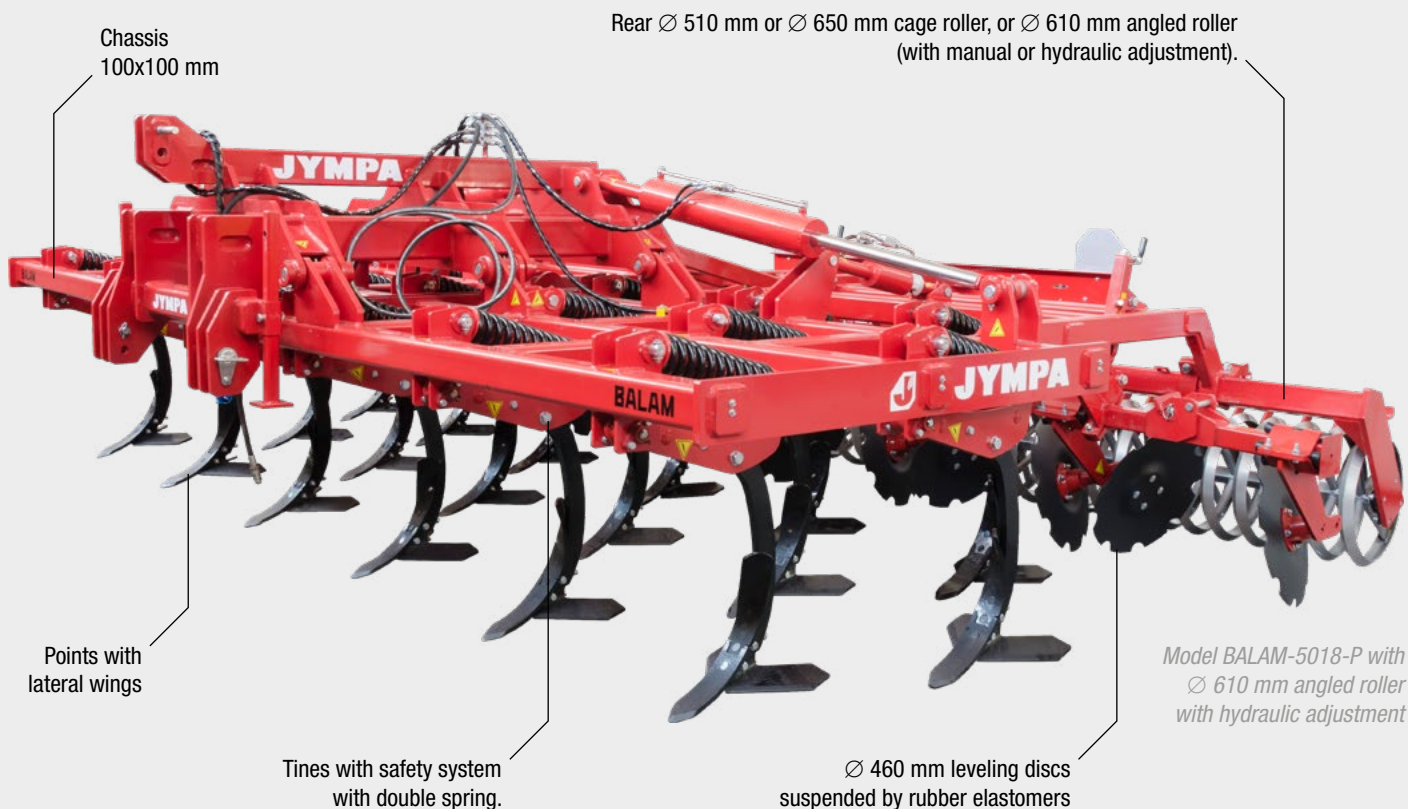

Agriculture

BALAM

Stubble field cultivator

It is the latest evolution of cultivators. Its specific coulters and its high clearance make it particularly suitable for land with high plant cover and a lot of crop debris.

The curved coulters turn the soil and dig deeper, combining vertical and turning work. The rear discs level the soil turned over by the coulters, avoiding the formation of furrows.

**“Maximum
versatility”**

Roller options



Model BALAM-3010
with Ø 610 mm angled roller
with hydraulic adjustment



Single cage roller



Angled roller



Tines with
double spring
safety system

Optional elements:

- Roller hydraulically adjustable
- Lightning kit
- V20 reflective plates

Model	Required power HP	Folding	Working width m	Transport width m	Working depth cm	Clearance cm	N° rows	N° tines	Tines spacing cm	No. discs	Approx. weight with Ø 510 mm cage roller kg
BALAM-3010	110-170	Fixed	3.00	3.00	35	85	3	10	65	8	1,400
BALAM-3512	140-200	Fixed	3.50	3.50 ♦	35	85	3	12	65	8	1,650
BALAM-4014	170-240	Fixed	4.00	4.00 ♦	35	85	3	14	65	10	1,950
BALAM-4014-P	120-250	Folded	4.00	3.00	35	85	3	14	65	10	2,100
BALAM-5018-P	250-300	Folded	5.00	3.00	35	85	3	18	65	12	2,450
BALAM-6022-P	300-350	Folded	6.00	3.00	35	85	3	22	65	14	2,900

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.

♦ Models with total width > 3.05 m (please refer to the current traffic regulations in force in your country).