



NIKKAL

Super-chisel

The **NIKKAL** super-chisel is the improved and reinforced evolution of the traditional DAGON chisel.

Its 100x100 mm frame, its 80x40 mm profile tines and its double spring damping provide great robustness and resistance. Its high ground clearance makes it an ideal machine for deep tillage in hard, difficult, demanding terrains or with a lot of crop debris.


“For hard, difficult and demanding terrains”



Model NIKKAL-11-3F with Ø 600 mm angled roller



20 - 45 cm
working depth

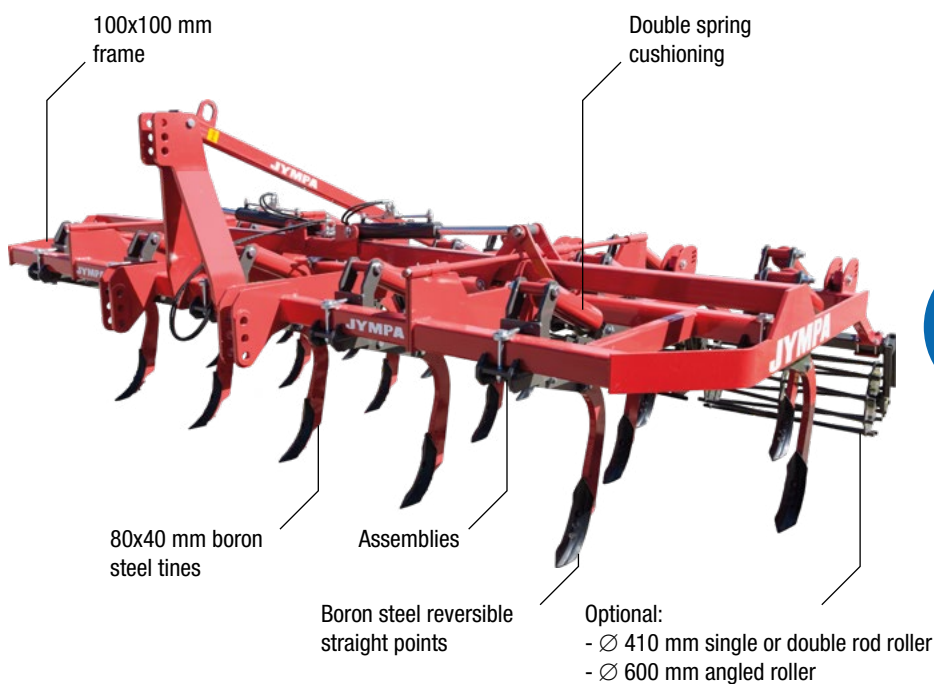

Roller options




Single cage roller



Angled roller

Model NIKKAL-17-3F-PL with Ø 410 mm single cage roller

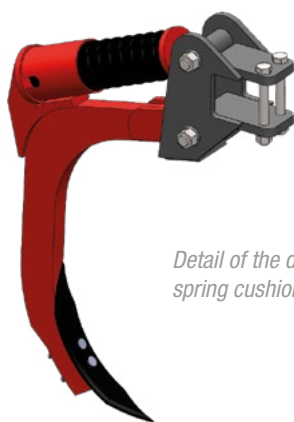

Detail of the double spring cushioning

Optional elements:

- Steel or tungsten straight points
- Levelling wheels
- Lightning kit
- V20 reflective plates

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening safety system**.

Model	Required power HP	Folding	Distribution folded frame	Machine width m	Working depth cm	Clearance cm	N° rows	N° tines	Rows spacing cm	Tines spacing cm	Hitch category	Approximate weight kg
2 ROWS OF TINES												
NIKKAL-9-2F	110-130	Fixed	-	2.50	20 - 45	80	2	9	85	58	3	1,250
NIKKAL-11-2F	120-150	Fixed	-	3.05	20 - 45	80	2	11	85	58	3	1,450
3 ROWS OF TINES												
NIKKAL-11-3F	120-160	Fixed	-	3.05	20 - 45	80	3	11	85	78	3	1,620
NIKKAL-13-3F-PL	160-190	Lateral hydr.	2+9+2	3.70	20 - 45	80	3	13	85	78	3	2,100
NIKKAL-15-3F-PL	190-220	Lateral hydr.	3+9+3	4.20	20 - 45	80	3	15	85	82	3	2,450
NIKKAL-17-3F-PL	220-240	Lateral hydr.	3+11+3	4.70	20 - 45	80	3	17	85	82	3	2,800
NIKKAL-19-3F-PL	240-260	Lateral hydr.	4+11+4	5.20	20 - 45	80	3	19	85	82	3	3,100
NIKKAL-21-3F-PL	260-300	Lateral hydr.	5+11+5	5.70	20 - 45	80	3	21	85	82	3 - 4	3,300

— Models with hydraulic folding. When folded, their total width is less than or equal to 3.05 m.